

## Technical parameters

Model(s):	Outdoor unit: AW-YHPSA10-H91 Indoor unit: ODMA-100T-09M22-19/25
Air-to-water heat pump:	YES
Water-to-water heat pump:	NO
Brine-to-water heat pump:	NO
Low-temperature heat pump:	NO
Equipped with a supplementary heater:	NO
Heat pump combination heater:	NO
Declared climate condition:	AVERAGE
Parameters are declared for medium-temperature application.	

Item	Symbol	Value	Unit	Item	Symbol	Value	Unit
Rated heat output (*)	Prated	7.7	kW	Seasonal space heating energy efficiency	$\eta_s$	136.6	%
Declared capacity for heating for part load at indoor temperature 20 °C and outdoor temperature Tj				Declared coefficient of performance or primary energy ratio for part load at indoor temperature 20 °C and outdoor temperature Tj			
Tj = -7°C	Pdh	6.78	kW	Tj = -7°C	COPd	2.24	-
Tj = 2°C	Pdh	4.28	kW	Tj = 2°C	COPd	3.42	-
Tj = 7°C	Pdh	2.77	kW	Tj = 7°C	COPd	4.52	-
Tj = 12°C	Pdh	1.58	kW	Tj = 12°C	COPd	5.68	-
Tj = bivalent temperature	Pdh	6.78	kW	Tj = bivalent temperature	COPd	2.24	-
Tj = operating limit	Pdh	5.38	kW	Tj = operating limit	COPd	1.83	-
For air-to-water heat pumps: Tj = -15°C	Pdh	-	kW	For air-to-water heat pumps: Tj = -15°C	COPd	-	-
Bivalent temperature	Tbiv	-7	°C	For air-to-water heat pumps: Operation limit temperature	TOL	-10	°C
Cycling interval capacity for heating	P <sub>cych</sub>	-	kW	Cycling interval efficiency	COP <sub>cyc</sub>	-	-
Degradation co-efficient (**)	Cdh	0.9	--	Heating water operating limit temperature	WTOL	60	°C
Power consumption in modes other than active mode				Supplementary heater			
Off mode	P <sub>off</sub>	0.014	kW	Rated heat output (**)	P <sub>sup</sub>	2.29	kW
Standby mode	P <sub>sb</sub>	0.014	kW	Type of energy input	Electrical		
Thermostat-off mode	P <sub>to</sub>	0.024	kW				
Crankcase heater mode	P <sub>ck</sub>	0.000	kW				

Other items			
Capacity control	variable		
Sound power level, indoors/outdoors	L <sub>WA</sub>	42/60	dB
Annual energy consumption	Q <sub>HE</sub>	4539	kWh
For air-to-water heat pumps: Rated air flow rate, outdoors	-	4030	m <sup>3</sup> /h
For water-or brine-to-water heat pumps: Rated brine or water flow rate, outdoor heat exchanger	-	-	m <sup>3</sup> /h

For heat pump combination heater:			
Declared load profile	-		
Daily electricity consumption	Q <sub>elec</sub>	-	kWh
Annual electricity consumption	AEC	-	kWh
Water heating energy efficiency	$\eta_{wh}$	-	%
Daily fuel consumption	Q <sub>fuel</sub>	-	kWh
Annual fuel consumption	AFC	-	GJ

Contact details	AIRWELL RESIDENTIAL S.A.S. - 10 rue du fort de Saint Cyr - 78180 Montigny-le-Bretonneux - France
-----------------	--



(\*) For heat pump space heaters and heat pump combination heaters, the rated heat output Prated is equal to the design load for heating Pdesignh, and the rated heat output of a supplementary heater Psup is equal to the supplementary capacity for heating sup(Tj).  
(\*\*) If Cdh is not determined by measurement then the default degradation coefficient is Cdh = 0,9.




**ENERG** Y IJA  
енергия · ενεργεια IE IA

*Airwell*




AW-YHPSA10-H91  
ODMA-100T-09M22-19

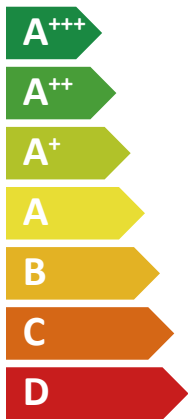

**A<sup>++</sup>**

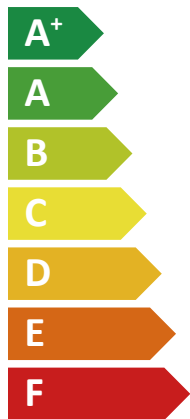

**A<sup>+</sup>**

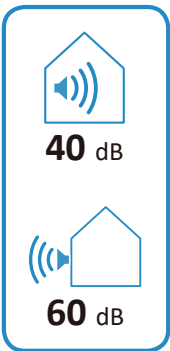

2019



811/2013




**ENERG** Y IJA  
енергия · ενεργεια IE IA

*Airwell*




AW-YHPSA10-H91  
ODMA-100T-09M22-25

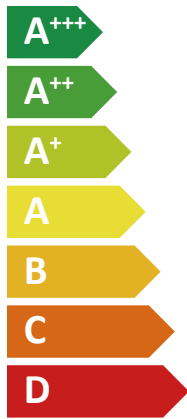

**A<sup>++</sup>**

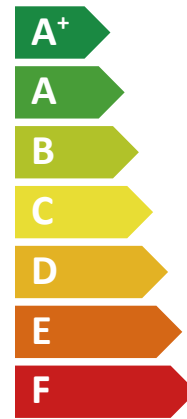

**A<sup>+</sup>**

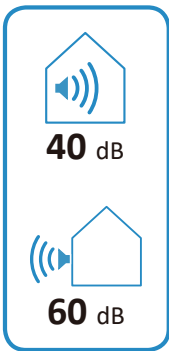

2019

811/2013





**ENERG**  
енергия · ενεργεια

Y IJA  
IE IA

*Airwell*

AW-YHPSA10-H91  
ODMA-100T-09M22-19



55°C

35°C



A++

A+++

**40dB**

**60dB**

■ 7	■ 8
■ 8	■ 9
■ 9	■ 9

kW                      kW

2019

811/2013



**ENERG**  
енергия · ενεργεια

Y IJA  
IE IA


*Airwell*

AW-YHPSA10-H91  
ODMA-100T-09M22-25



55°C

35°C

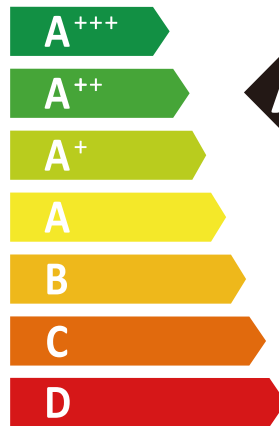

A++

A+++

**40dB**

**60dB**

■ 7	■ 8
■ 8	■ 9
■ 9	■ 9

kW                      kW

2019

811/2013